

IPOD-SB2IRE28: Specifications



2mp IP Network Eyeball Dome Weatherproof with IR



Key Features:

- 2 Mega Pixel 1080P (1920 x 1080)
- Max. Resolution: 1920 x 1080
- ICR auto switch, true day / night
- 32 ~ 65 feet IR night view distance
- 3D DNR, digital WDR
- ROI coding
- Supports local CVBS video output and one-way audio
- Supports PoE power supply
- Supports smart phone, iPad, remote monitoring
- Supports three streams

Dimensions:

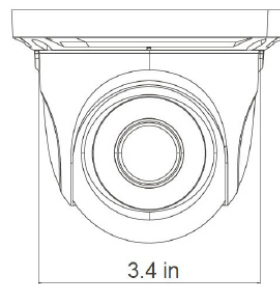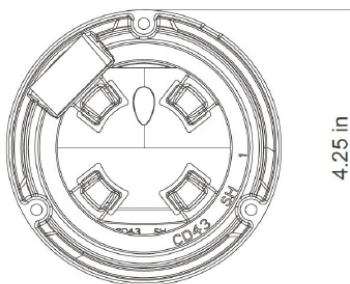

Compatible Camera Mounts:



Part#: JB-SB-ODR Part#: WM-SB-ED-JB

Specification Subject to change without Notice*

Model#: IPOD-SB2IRE28	
Camera	
Image Sensor	1 / 2.8 "CMOS
Image Size	1920 x 1080
Electronic Shutter	1 / 25 s ~ 1 / 100000 s
Min. Illumination	0.1 lux @F1.2,AGC ON; 0 lux with IR
Lens	2.8mm Fixed
Lens Mount	M12
Day & Night	ICR
Wide Dynamic Range	Digital WDR
Digital NR	3D DNR
Angle Adjustment	Any Angle
Image	
Video Compression	H.264 / MJPEG
Resolution	1080P (1920 x 1080), 720P (1280 x 720), D1, CIF, 480 x 240
Main stream	60Hz : 1080P(1 ~ 30fps) / 720P(1 ~ 30fps) 50Hz : 1080P(1 ~ 25fps) / 720P(1 ~ 25fps)
Bit rate	256Kbps ~ 5Mbps
Encode Mode	VBR / CBR
ROI	3 ROI
Quality	Five levels under VBR; Freely adjustable under CBR
Image Settings	ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR, etc. Adjustable through client software or web browser
Interfaces	
Network	RJ45
Functions	
Remote Monitoring	IE browsing, CMS remote control
Online Connection	Support simultaneous monitoring for up to 3 users; Support multi-stream real time transmission
Protocol	TCP/IP, UDP, DHCP, NTP, RTSP, DDNS, SMTP, FTP
Interface Protocol	ONVIF
Storage	Network remote storage
Smart Alarm	Motion Alarm
PoE	Yes
IR Distance	32-65ft (10~20m)
Water-proof	IP66
Other	
Power Supply	DC 12V / PoE
Power Consumption	< 2W
IR Consumption ON	< 4W
Operating Environment	- 20 °C ~ 50 °C, 10 % ~ 90 % humidity
Dimensions (mm)	φ 87 × 108
Weight (net)	369g