

# IPOB-SB2IR: Specifications


2mp IP Network Bullet Camera Weatherproof with IR



## Key Features:

- 2 Mega Pixel 1080P ( 1920 x 1080 )
- Max. Resolution: 1920 x 1080
- ICR auto switch, true day / night
- 65 ~ 95 feet IR night view distance
- 3D DNR, digital WDR
- ROI coding
- Supports local CVBS video output and one-way audio
- Supports PoE power supply
- Supports smart phone, iPad, remote monitoring
- Supports three streams

## Dimensions:

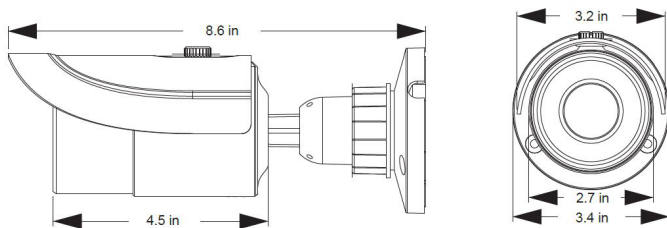

## Compatible Camera Mounts:

Part Number: JB-SB-BR



Model#: IPOB-SB2IR	
<b>Camera</b>	
Image Sensor	1 / 2.7 "CMOS
Image Size	1920 x 1080
Electronic Shutter	1 / 25 s ~ 1 / 100000 s
Min. Illumination	0.05 lux @F1.2,AGC ON; 0 lux with IR
Lens	3.6mm
Lens Mount	M12
Angle Adjustment	Any Angle
<b>Image</b>	
Video Compression	H.264 / MJPEG
Resolution	1080P ( 1920x1080 ),720P ( 1280x720 ) D1,CIF(480x240)
Main stream	60Hz : 1080P( 1 ~ 30fps ) / 720P( 1 ~ 30fps ) 50Hz : 1080P( 1 ~ 25fps ) / 720P( 1 ~ 25fps )
Bit rate	64 Kbps ~ 8 Mbps
Encode Mode	VBR / CBR
Quality	Five levels under VBR; Freely adjustable under CBR
Image Settings	ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR,etc. Adjustable through client software or web browser
<b>Interfaces</b>	
Network	RJ45
Audio	One-way audio (MIC IN x 1)
Video Output	CVBS video output ( BNC x 1 )
<b>Functions</b>	
Remote Monitoring	IE browsing,CMS remote control
Online Connection	Support simultaneous monitoring for up to 4 users; Support multi-stream real time transmission
Protocol	TCP / IP, UDP, DHCP, NTP, R Protocol TSP, PPPoE, DDNS, SMTP, FTP
Storage	Network remote storage
Smart Alarm	Motion Alarm
Day & Night	ICR
PoE	Yes
IR Distance	65-95ft (20~30m)
Water-proof	IP66
<b>Other</b>	
Power Supply	DC 12V / PoE
Power Consumption	< 3.5W
IR Consumption ON	< 6W
Operating Environment	- 20 °C ~ 50 °C,10 % ~ 90 % humidity
Dimensions ( mm )	ø 87 x 219
Weight ( net )	608g
Installation	Wall mounting, pendent mounting

Specification Subject to change without Notice\*