SIBELL
By eLine Technology

SIBELL SERIES OUTDOOR DOME

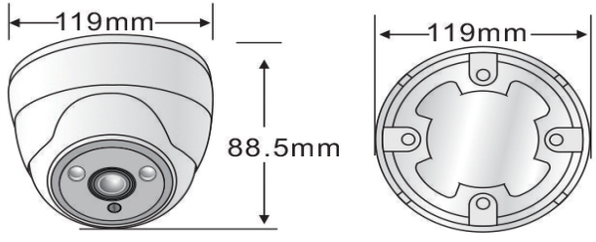

WARNING

Please don't open camera, there is danger of eletric shock

To reduce the risk of eletric shock,do not open the case or back cover of the camera. Everything needed for user operation is on surface of camera.Please seek help from a qualified professional for repair.

Attention

Do not touch CMOS or lens

Keep camera out of dangers way

Use specified power supply provided

Point camera lens away from strong light

Installation



1. Fix the bracket onto the wall, then fix the camera to the bracket

2. Turn the camera to desired position

3. Adjust the zoom and focus to desired position

4. Connect the camera to the system

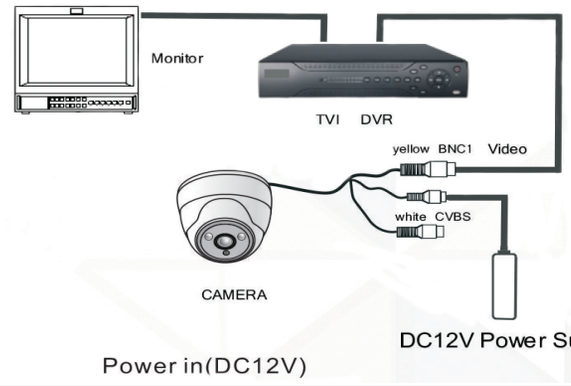

5. Auto Focus Control

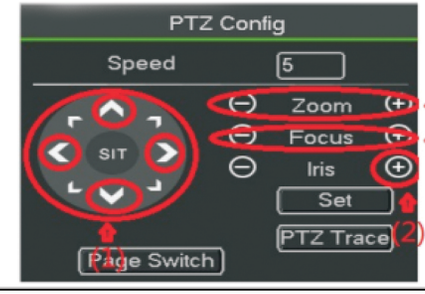

1. Moves left,down,right, and up
2. Press to confirm
3. Adjusts focus length
4. Adjusts the field angle of lens

Specifications

	HDOD-SB2IRZB
Image Sensor	1/3" 2.4M Panasonic CMOS
Effective pixels	1944(H) X 1092(V)
Sensor area	7.6mmX5.8mm
Scanning System	Progressive
Resolution	Digital:1920×1080p(1080p/30fps) 1280×720p(720p/60fps) Analog:700TVL
Day & Night	EXTERN,COLOR, B&W,AUTO
Minimum illumination	COLOR:0. 1Lux@(F2.0，AGC ON) B&W:0.01Lux@(F2.0，AGC ON)
S/N ratio	>50dB(AGC Off)
White balance	AUTO
Lens	2.8-12mm Motorized Zoom lens
Video output	CVI AHD TVI SELECTABLE By OSD
IR LED	2PCS dot matrix IR LED
IR distance	25-30M
Power supply	DC 12V±10 %
Power consumption	less than 4.2W

Specifications are subject to change without notice